
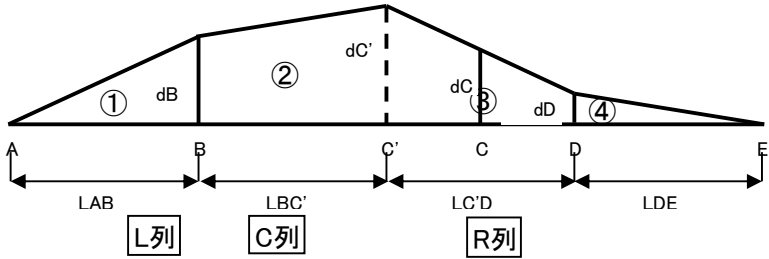


佐田トンネル裏込め注入計算書(削孔後空隙確認)

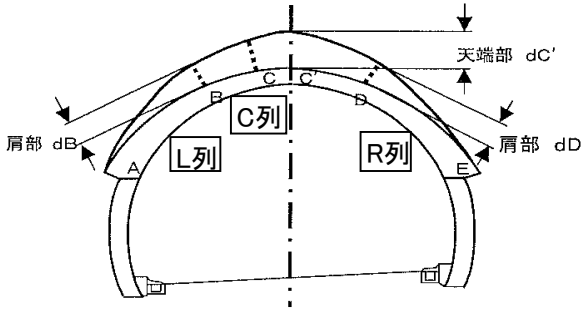

				L列	C列	R列	底辺(m)				面積(m ²)					注入量	注入量 × 1.7倍 昨年比較	
スパンNo	孔番(L・R)	孔番	単距離	左実測 (dB)	中実測 (dC)	右実測 (dD)	LAB	LBC'	LC'D	LDE	①	②	③	④	合計			
S001	1	1	4.5	0.100	0.220	0.130	3.20	2.5	2.5	3.20	0.16	0.40	0.44	0.21	1.21	5.42	9.21	
S002	2	2	4.5	0.170	0.200	0.070	3.20	2.5	2.5	3.20	0.27	0.46	0.34	0.11	1.18	11.11	18.89	
		3	4.5	0.170	0.240	0.070	3.20	2.5	2.5	3.20	0.27	0.51	0.39	0.11	1.28			
S003	3	4	4.55	0.410	0.100	0.290	3.20	2.5	2.5	3.20	0.66	0.64	0.49	0.46	2.25	20.70	35.19	
	4	5	4.55	0.280	0.500	0.090	3.20	2.5	2.5	3.20	0.45	0.98	0.74	0.14	2.30			
S004	5	6	4.5	0.080	0.060	0.060	3.20	2.5	2.5	3.20	0.13	0.18	0.15	0.10	0.55	7.08	12.04	
	6	7	4.5	0.090	0.170	0.120	3.20	2.5	2.5	3.20	0.14	0.33	0.36	0.19	1.02			
S005	7	8	4.5	0.070	0.730	0.360	3.20	2.5	2.5	3.20	0.11	1.00	1.36	0.58	3.05	23.48	39.92	
	8		4.5	0.070	0.730	0.050	3.20	2.5	2.5	3.20	0.11	1.00	0.98	0.08	2.17			
S006	9	9	4.5	0.020	0.250	0.060	3.20	2.5	2.5	3.20	0.03	0.34	0.39	0.10	0.85	11.70	19.89	
	10	10	4.5	0.400	0.220	0.020	3.20	2.5	2.5	3.20	0.64	0.78	0.30	0.03	1.75			
S007	10-①	10-①	4.55	0.250	0	0.010	3.20	2.5	2.5	3.20	0.40	0.31	0.01	0.02	0.74	15.17	25.79	
	10-②	10-②	4.55	0.400	0.570	0.010	3.20	2.5	2.5	3.20	0.64	1.21	0.73	0.02	2.59			

合計 160.93 ≒ 160m³